

\*ARMY TM 9-2320-387-10  
AIR FORCE TO 36A12-1A-3061-1  
MARINE CORPS TM 11033-OR

---

## TECHNICAL MANUAL OPERATOR'S MANUAL FOR

TRUCK, UTILITY: S250 SHELTER CARRIER,  
4X4, M1113 NSN 2320-01-412-0143 (EIC B6B)

TRUCK, UTILITY: UP-ARMORED CARRIER,  
4X4, M1114 NSN 2320-01-413-3739 (EIC B6C)

TRUCK, UTILITY: EXPANDED CAPACITY,  
ARMAMENT CARRIER, M1151 NSN 2320-01-518-7330 (EIC BA5)

TRUCK, UTILITY: EXPANDED CAPACITY, ARMAMENT CARRIER,  
IAP/ARMOR READY, M1151A1 NSN 2320-01-540-2038 (EIC BEG)

TRUCK, UTILITY: EXPANDED CAPACITY, ENHANCED, M1152  
NSN 2320-01-518-7332 (EIC BA6)

TRUCK, UTILITY: EXPANDED CAPACITY, ENHANCED,  
IAP/ARMOR READY, M1152A1 NSN 2320-01-540-2007 (EIC BEH)

TRUCK, UTILITY: COMMAND AND CONTROL/GENERAL  
PURPOSE VEHICLE, M1165 NSN 2320-01-540-1993 (EIC BEK)

TRUCK, UTILITY: COMMAND AND CONTROL/GENERAL  
PURPOSE VEHICLE, IAP/ARMOR READY,  
M1165A1 NSN 2320-01-540-2017 (EIC BEJ)

TRUCK, UTILITY: EXPANDED CAPACITY,  
TOW ITAS CARRIER, M1167 NSN 2320-01-544-9638 (EIC BF9)

TRUCK, AMBULANCE, 4-LITTER, 4X4,  
M997A3 NSN 2310-01-595-3986

**\*SUPERSEDURE NOTICE:** This TM supersedes TM 9-2320-387-10 dated 09 January 2012 and all changes.

**DISTRIBUTION STATEMENT C:** Distribution authorized to U.S. Government agencies and their contractors. REASON: Critical Technology. DATE OF DETERMINATION: 4 October 2007. Other requests for this document shall be referred to the U.S. Army TACOM Life Cycle Management Command, ATTN: AMSTA-LCL-MPP/ TECH PUBS, MS 727, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

**WARNING:** This document contains technical data whose export is restricted by the Arms Export Control Act (TITLE 22, U.S.C. SEC 2751, ET SEQ.) or the Export Administration Act of 1979, as amended, TITLE 50, U.S.C., APP 2401 ET SEQ. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with Provisions of DOD DIRECTIVE 5230.25.

**DESTRUCTION NOTICE:** Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

---

HEADQUARTERS, DEPARTMENTS OF THE ARMY, AIR FORCE, AND  
HEADQUARTERS, US MARINE CORPS  
28 SEPTEMBER 2012

Marine Corps PCN 184 110330 00

**OPERATOR MAINTENANCE  
PREVENTIVE MAINTENANCE CHECKS AND SERVICES (PMCS) - BEFORE**

**INITIAL SETUP:**

**References**

- WP 0117
- AR 385-10
- DA Form 2404

**Table 1. Preventive Maintenance Checks and Services - Before.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			<p style="text-align: center;"><b><u>WARNING</u></b></p> <p>Always remember WARNINGS, CAUTIONS, and NOTES before operating this vehicle and prior to PMCS.</p> <p style="text-align: center;"><b>NOTE</b></p> <p>Perform your before, after, and weekly checks if:</p> <ol style="list-style-type: none"> <li>1. You are the assigned driver but have not operated the vehicle since the last weekly inspection.</li> <li>2. You are operating the vehicle for the first time.</li> <li>3. See separate manual for TOW ITAS PMCS.</li> </ol>	

**Table 1. Preventive Maintenance Checks and Services - Before - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
1.	Before	Left Front, Side Exterior	<p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>CAUTION</u></b></p> <p>If leaks are detected in area of transfer case oil cooler, do not attempt to tighten retaining nuts. Internal damage to transfer case oil cooler may result. Notify field maintenance.</p> <p style="text-align: center;"><b>NOTE</b></p> <p>If leakage is detected, further investigation is needed to determine location and cause of leak.</p> <p>a. Visually check underneath vehicle for any evidence of fluid leakage.</p> <p>b. Visually check front and left side of vehicle for obvious damage that would impair operation.</p> <p style="text-align: center;"><b>NOTE</b></p> <p>Perform following check prior to airlift procedure.</p> <p>c. Inspect shackle for loose or missing mounting hardware.</p>	<p>Any brake fluid leaks; class III leak of oil, fuel, or coolant.</p> <p>Any damage that prevents operation.</p> <p>Loose or missing hardware.</p>
2.	Before	Left Side Tires	<p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>WARNING</u></b></p> <p>Operating a vehicle with a tire in an underinflated condition or with a questionable defect may lead to premature tire failure and may cause equipment damage and injury or death to personnel.</p> <p style="text-align: center;"><b>NOTE</b></p> <p>Radial tire is a bidirectional tire and tread may be positioned in either direction.</p>	

**Table 1. Preventive Maintenance Checks and Services - Before - Continued.**


ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
3.	Before	Rear Exterior	<p>Visually check tires for underinflation and defects.</p> <p><b>DRIVER</b></p> <p><b>NOTE</b> If leakage is detected, further investigation is needed to determine location and cause of leak.</p> <p>a. Visually check underneath vehicle for evidence of fluid leakage.</p> <p>b. Visually check rear of vehicle for obvious damage that would impair operation.</p> <p>c. Inspect bumper supports for cracks before towing trailer.</p> <p><b>NOTE</b> Perform following check prior to airlift procedure.</p> <p>d. Inspect shackle for loose or missing mounting hardware.</p>	<p>Tire missing, deflated, or unserviceable.</p> <p>Any brake fluid leaks; class III leak of oil, fuel, or coolant.</p> <p>Any damage that prevents operation.</p> <p>Any damage that prevents operation.</p>
4.	Before	Right Front, Side Exterior	<p><b>DRIVER</b></p> <p><b>NOTE</b> If leakage is detected, further investigation is needed to determine location and cause of leak.</p> <p>a. Visually check underneath vehicle for evidence of fluid leakage.</p> <p>b. Visually check front and right side of vehicle for obvious damage that would impair operation.</p>	<p>Loose or missing hardware.</p> <p>Any brake fluid leaks; class III leak of oil, fuel, or coolant.</p> <p>Any damage that prevents operation.</p>

**Table 1. Preventive Maintenance Checks and Services - Before - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
5.	Before	Exhaust Louvers (M997A3)	<p align="center"><b>NOTE</b></p> <p>Perform following check prior to airlift procedure.</p> <p>c. Inspect shackle for loose or missing mounting hardware.</p> <p><b>DRIVER</b> Check air exhaust louvers to ensure they are clear and free of debris that would restrict air flow. Clean any dirt or debris from louvers.</p>	<p>Loose or missing hardware.</p> <p>Any dirt or debris on exhaust louvers.</p>
6.	Before	Right Side Tires	<p><b>DRIVER</b></p> <p align="center"><b><u>WARNING</u></b></p> <p>Operating a vehicle with a tire in an underinflated condition or with a questionable defect may lead to premature tire failure and may cause equipment damage and injury or death to personnel.</p> <p align="center"><b>NOTE</b></p> <p>Radial tire is a bidirectional tire and tread may be positioned in either direction.</p> <p>Visually check tires for underinflation and defects.</p>	<p>Tire missing, deflated, or unserviceable.</p>
7.	Before	Front	<p><b>DRIVER</b></p> <p align="center"><b>NOTE</b></p> <p>If leakage is detected, investigation is needed to determine location and cause of leak.</p> <p>a. Visually check front of vehicle for obvious damage that would impair operation.</p> <p>b. Visually check underneath vehicle for evidence of fluid leakage.</p>	<p>Any damage that prevents operation.</p> <p>Any brake fluid leaks; class III leak of oil, fuel, or coolant.</p>

**Table 1. Preventive Maintenance Checks and Services - Before - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
8.	Before	Power Steering Reservoir (Serial Numbers 196900 and Below)	<p><b>DRIVER</b></p> <p><b><u>CAUTION</u></b></p> <ul style="list-style-type: none"> <li>• Do not permit dirt, dust, or grit to enter power steering reservoir. Damage to power steering system will result if power steering fluid becomes contaminated.</li> <li>• Do not overfill power steering reservoir. Damage to power steering system will result.</li> </ul> <p>Check fluid in power steering reservoir (WP 0117). Fluid should be between <b>HOT</b> and <b>COLD</b> marks. Add fluid if level is below <b>COLD</b> mark.</p>	

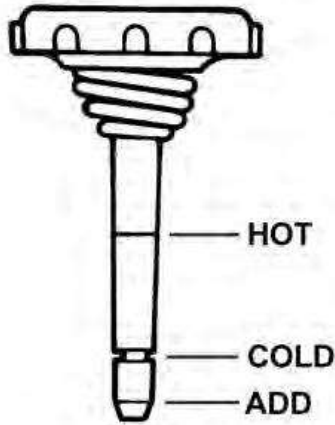

*Figure 1. Power Steering Reservoir Cap (Serial Numbers 196900 and Below).*

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
9.	Before	Power Steering Reservoir (Serial Numbers 196901 and Above)	<p><b>DRIVER</b></p> <p><b><u>CAUTION</u></b></p> <ul style="list-style-type: none"> <li>• Do not permit dirt, dust, or grit to enter power steering reservoir. Damage to power steering system will result if power steering fluid becomes contaminated.</li> <li>• Do not overfill power steering reservoir. Damage to power steering system will result.</li> </ul> <p>Check sightglass for proper fluid level. If fluid is <b>HOT</b>, level should be at top of sightglass. If fluid is <b>COLD</b>, fluid should be in center of sightglass. Add fluid if level is at bottom of sightglass.</p>	
<p><i>Figure 2. Power Steering Reservoir Cap (Serial Numbers 196901 and Above).</i></p>				
10.	Before	Serpentine Drivebelt and Pulleys	<p><b>DRIVER</b></p> <p>a. Visually check drive and idler pulleys for evidence of excessive wear or misalignment.</p>	Pulleys worn, broken, or misaligned.

**Table 1. Preventive Maintenance Checks and Services - Before - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			b. Check if serpentine drivebelt is missing, broken, cracked, frayed, loose, misaligned, or split.	Serpentine drivebelt is missing or broken. Drivebelt fiber has more than one crack 1/8 in. (3.2 mm) in depth or 50% of belt thickness, or frays more than 2 in. (5.1 cm) long. Drivebelt is loose or misaligned (off one or more grooves on any pulley).



Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
11.	Before	Cooling System	<p><b>DRIVER</b></p> <p><b><u>WARNING</u></b></p> <p>If engine has been recently operated, do not remove radiator cap to check coolant level. Cooling system is under pressure, and escaping steam or coolant can cause burns.</p> <p><b><u>CAUTION</u></b></p> <ul style="list-style-type: none"> <li>• Type 1, ethylene glycol (green), and Type 2, propylene glycol (purple), should never be mixed due to their difference in toxic properties. Failure to comply may result in damage to equipment.</li> <li>• Using antifreeze without mixing it with water can cause high operating temperatures, blockage of cooling system passages, and damage to water pump seals.</li> </ul> <p><b><u>NOTE</u></b></p> <p>Type 1 antifreeze is an ethylene glycol based coolant, green in color. Type 1 can be added to factory-filled pink coolant. When it becomes necessary to flush factory coolant, Type 1, ethylene glycol, will be used. When mixing Type 1 antifreeze with water, distilled water is recommended. Tap water should only be used in emergency situations.</p> <p>Check coolant level in coolant tank. Level should be at or above <b>FULL COLD</b> line. Add coolant if below <b>FULL</b> line.</p>	
12.	Before	Doors (M1114 Only)	<p><b>DRIVER</b></p> <p>Check door for proper operation of door lock.</p>	Door does not lock.

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
13.	Before	Seat and Seatbelts	<p><b>DRIVER</b></p> <p><b>NOTE</b> Vehicle operation with inoperative seatbelts may violate AR 385-10.</p> <p>a. Check all seatbelts for security, damage, and operation of buckle and clasp ends.</p> <p>b. Check gunner's restraint for security, damage, and operation of harness, tail strap, sling seat assembly, turret brackets, mount retractor, rotary buckle quick release and clasp ends.</p> <p>c. Check operation of seat adjusting mechanism (driver's seat only).</p>	<p>Harness, tail strap, sling seat assembly is missing, frayed, damaged or does not fasten, adjust, retract or operate.</p> <p>Seat adjustment lock broken or missing.</p>
14.	Before	Fire Extinguisher	<p><b>DRIVER</b></p> <p>a. Check for missing or damaged fire extinguisher.</p> <p>b. Check gauge for proper pressure of about 150 psi (1,034 kPa).</p> <p>c. Check for damaged or missing seal.</p>	<p>Fire extinguisher missing or damaged.</p> <p>Pressure gauge needle in recharge area.</p> <p>Seal broken or missing.</p>

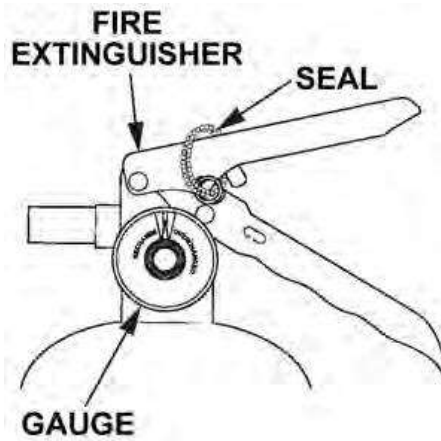


Figure 3. Fire Extinguisher.

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
15.	Before	Automatic Fire Extinguishing System	<p><b>DRIVER</b></p> <p><b><u>WARNING</u></b></p> <p>Always assume the fire extinguisher is charged, even if the gauge does not show any pressure. Failure to comply may cause equipment damage and injury or death to personnel.</p> <p><b><u>CAUTION</u></b></p> <p>Do not handle fire extinguisher unless anti-recoil plug is installed in valve outlet port and manual lever lock pin is installed in lever lock holes.</p> <p><b><u>NOTE</u></b></p> <ul style="list-style-type: none"> <li>• Smoking in a vehicle with Automatic Fire Extinguishing System (AFES) installed may activate sensor and cause system to discharge.</li> <li>• Large, high intensity spotlights may activate sensor and cause system to discharge.</li> </ul> <p>a. Check that pressure gauges on fire extinguishers read at or above minimum pressure on extinguisher label using Minimum Pressure table below.</p>	<p>Pressure gauge reads below pressure shown on label.</p>



Figure 4. AFES Pressure Gauge.



Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			<div data-bbox="732 348 886 764" data-label="Image"> </div> <p data-bbox="526 793 1092 827"><i>Figure 6. AFES Wiring Harness and Sensor.</i></p> <ul style="list-style-type: none"> <li data-bbox="695 848 1133 982">c. Check for loose, improperly installed, or missing fire extinguisher, manual lever lock pin or tube assembly.</li> <li data-bbox="695 1003 1133 1066">d. Check that anti-recoil plugs are properly stowed.</li> </ul>	Fire extinguisher, manual lever lock pin or tube assembly missing.
			<div data-bbox="716 1100 899 1524" data-label="Image"> </div> <p data-bbox="591 1558 1027 1591"><i>Figure 7. AFES Fire Extinguisher.</i></p> <ul style="list-style-type: none"> <li data-bbox="695 1612 1133 1780">e. Turn rotary switch to <b>RUN</b> position, check control module LED indicator for a continuous <b>ON</b> green light to see if system is fully functional.</li> <li data-bbox="695 1801 1133 1864">f. Check for damaged or missing safety wire.</li> </ul>	Green LED indicator light is off, steady blink, slow blink, or double blink.  Safety wire is damaged or missing.

Table 1. Preventive Maintenance Checks and Services - Before - Continued.


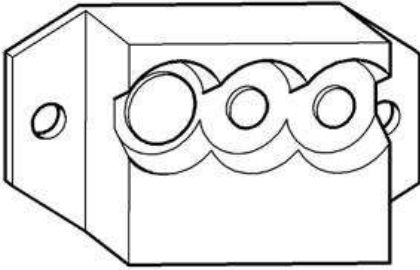
ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			 <p data-bbox="613 579 1005 611"><i>Figure 8. AFES Rotary Switch.</i></p> <p data-bbox="695 632 1081 726">g. Check fire sensors LED for continuous green light and cleanliness.</p>	<p data-bbox="1182 632 1409 831">LED light does not come on, is blinking, or covered with dust or any foreign object.</p>
16.	Before	NBC (CBRN) System (M997A3)	 <p data-bbox="594 1171 1024 1203"><i>Figure 9. AFES Fire Sensor LED.</i></p> <p data-bbox="695 1230 1133 1640"><b>DRIVER</b> a. Check NBC (CBRN) system power switch for proper operation and security of mounting. All system fuses, including spares, should be present. b. Check NBC (CBRN) heater for proper operation. c. Check for steady flow of air at hose outlets.</p>	<p data-bbox="1182 1230 1360 1325">Power switch inoperable or fuses missing.</p> <p data-bbox="1182 1493 1414 1524">Heater inoperable.</p> <p data-bbox="1182 1577 1414 1671">No steady flow of air present at hose outlets.</p>

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
17.	Before	Gear Shifter Lever	<p><b>DRIVER</b></p> <p>a. Check transmission shift lever operation. Shift transmission lever through all operating ranges. Lever should move freely through all range positions.</p> <p>b. Check transfer shift lever operation. With transmission in N, shift transfer lever through all range positions. Lever should move freely through all range positions.</p>	<p>Lever inoperable or binds between range detents.</p> <p>Lever inoperable or does not engage in all ranges with engine not running.</p>
18.	Before	Instrument Panel	<p><b>DRIVER</b></p> <p><b><u>WARNING</u></b></p> <p>If gauges, instruments, or instrument lights are inoperable or not within ranges described in these checks, immediately shut off engine and notify your supervisor or unit maintenance personnel. Continued operation of vehicle may result in injury to personnel or damage to equipment.</p> <p><b>NOTE</b></p> <p>If engine is warm, wait to start light may not come on. During cranking or after starting, light may go on and off a few times.</p> <p>a. Check wait to start light and brake warning light. Turn rotary switch to <b>RUN</b>. Wait to start and brake warning light should come on.</p>	<p>Wait to start light does not come on when engine is cold, or wait light stays on continually. Brake warning light does not come on.</p>

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

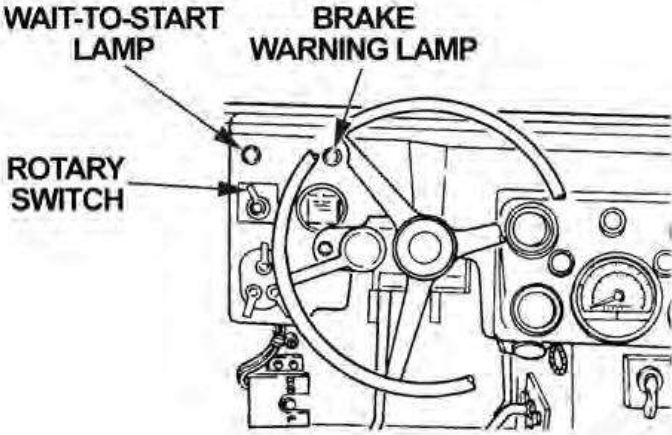
ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
 <p>The diagram shows a steering wheel in the center. To the left of the wheel, there is a rotary switch labeled 'ROTARY SWITCH'. Above the wheel, there are two indicator lamps: 'WAIT-TO-START LAMP' on the left and 'BRAKE WARNING LAMP' on the right. The dashboard behind the wheel contains several gauges and dials.</p>				
			<p>b. Start engine and check following:</p> <ol style="list-style-type: none"> <li>1. Engine oil pressure gauge.</li> <li>2. Voltmeter.</li> <li>3. Air restriction gauge.</li> <li>4. Brake warning light should go off when hand brake is released.</li> <li>5. Check fuel gauge.</li> </ol>	<p>Engine will not start.</p> <p>Oil pressure is less than 10 psi (69 kPa) at hot idle or 40-45 psi (276-310 kPa) at 2000 RPM.</p> <p>Voltmeter needle stays in yellow or red range.</p> <p>Air restriction indicator reaches red zone.</p> <p>Brake warning light stays on after hand brake is released or comes on while driving.</p>

Figure 10. Rotary Switch, Wait-To-Start Lamp, and Brake Warning Lamp.



Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			6. Check coolant temperature gauge.	Coolant temperature gauge inoperative or reads greater than 250° F (120° C) and/or overheat lamp illuminates.
<p>The diagram shows a steering wheel in front of an instrument panel. Several gauges and lights are labeled with arrows pointing to them: BRAKE WARNING LIGHT (top left), ENGINE OIL PRESSURE GAUGE (top center), COOLANT TEMPERATURE GAUGE (top right), AIR RESTRICTION GAUGE (bottom left, with a callout showing a circular gauge with 'AIR FILTER RESTRICTION GAUGE PUSH TO RESET'), FUEL GAUGE (bottom center), and VOLTMETER (bottom right).</p>				
			c. Check transmission indicator lamp.	Transmission indicator lamp stays on after engine has started or comes on while driving.

Figure 11. Instrument Panel Gauges.

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

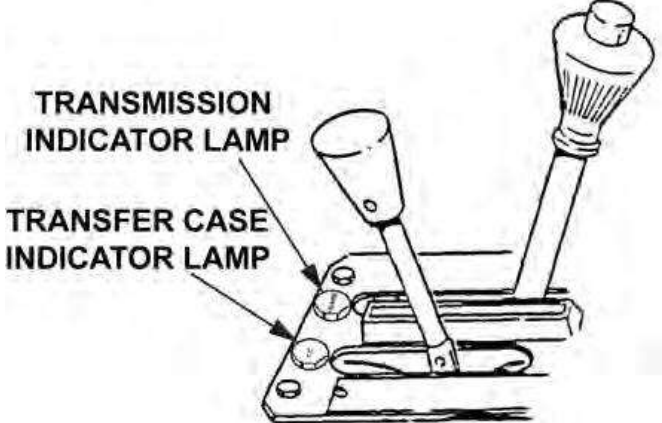
ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			<p>d. Check transfer case indicator lamp.</p>	<p>Transfer case indicator lamp stays on while vehicle is in H (high) or N (neutral). Transfer case indicator lamp stays off while vehicle is in HL (high lock) or L (low).</p>

Figure 12. Transmission and Transfer Case Gauges.

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
19.	Before	Air conditioner	<p><b>DRIVER</b></p> <p><b><u>CAUTION</u></b></p> <ul style="list-style-type: none"> <li>• Prior to engagement and during operation of the A/C, ensure the voltmeter needle is in the green zone. Failure to comply may result in damage to equipment.</li> <li>• For A/C system operation in ambient temperatures of 75° F or less, ensure that all instrument panel vents are fully open and the fan switch is on high. Failure to comply may result in damage to equipment.</li> </ul> <p><b>NOTE</b></p> <p>If ambient air temperature is below 40° F (4° C), A/C system will not operate. Move vehicle to warmer location or run vehicle, with heat ON, until engine is at normal operating temperature.</p> <ol style="list-style-type: none"> <li>a. Inspect rear evaporator air filter for dirt or damage.</li> <li>b. Turn air conditioner on. Wait 5 minutes to allow temperature to stabilize. Check vents for cool air.</li> </ol>	<p>Rear evaporator air filter is dirty or damaged.</p> <p>Air is not cooler than ambient temperature.</p>
20.	Before	Steering	<p><b>DRIVER</b></p> <p>Check steering wheel for operation. With engine running, turn steering wheel from left to right. Steering wheel should move freely.</p>	<p>Steering wheel inoperable or binds.</p>
21.	Before	Brakes	<p><b>DRIVER</b></p> <p><b>NOTE</b></p> <p>Engine must be warmed up and idling, transmission in OD (overdrive), transfer in H (high), and parking brake released to perform following check.</p>	


Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
22.	Before	Weapon Station (M1114, M1151, M1151A1, M1167)	<p>a. Check brake pedal travel. With vehicle at idle, transmission in OD, allow vehicle to move forward. As vehicle moves, slowly depress brake pedal. Pedal should travel 1 to 1 ½ in. (2.5 to 3.8 cm) before brakes take hold. After brakes take hold, pedal may exceed 1 to 1 ½ in. (2.5 to 3.8 cm) travel. This is normal.</p> <p>b. Check parking brake. With parking brake fully applied, transmission in OD or R, and transfer in H, vehicle should not move.</p> <p>c. Check parking brake lever safety mechanism to ensure that it latches when parking brake is applied.</p> <p><b>DRIVER</b></p> <p><b>NOTE</b></p> <p>Weapon station binding should be checked with weapon system or equivalent weight applied to turret. Refer to appropriate system TM to determine weight of weapon system.</p> <p>a. Check weapon station for binding by rotating 360° in both directions at least five times.</p>	<p>Brakes will not stop vehicle.</p> <p>Parking brake inoperable or unable to hold vehicle.</p> <p>Parking brake lever safety mechanism is not functioning properly.</p> <p>Weapon station binds.</p>

Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
23.	Before	Traversing Unit (M1114, M1151A1, M1167)	<p>b. Check armament mounting plate and bearing sleeve for security of mounting and obvious damage that would impair operation.</p> <p><b>DRIVER</b></p> <p><b>NOTE</b> If equipped with and operational Battery Powered Motorized Traversing Unit (BPMTU), a not fully mission capable Manual Traversing Unit (MTU) does not deadline weapon system.</p> <p>a. Check Manual Traversing Unit (MTU) gear linkage assembly for bent, broken, or missing linkage.</p> <p>b. Inspect MTU support bracket for loose or missing linkage.</p> <p>c. Inspect traversing handle for cracks or loose screws and quick release pin for damage or missing.</p> <p>d. Check MTU cover for damage or missing.</p> <p>e. Check disengage handle for proper operation.</p> <p>f. Check operation of MTU while engaged with weapon station by rotating 360° in both directions at least five times.</p>	<p>Armament weapons required for missions and mounting plate or bearing sleeve missing or any damage that prevents or impair mounting of armament weapons.</p> <p>Gearlinkage assembly bent, broken, or missing linkage.</p> <p>Loose or missing mounting hardware.</p> <p>Handle missing or unserviceable, or quick release pin damaged or missing.</p> <p>MTU cover is missing.</p> <p>Disengage handle not operating properly.</p>

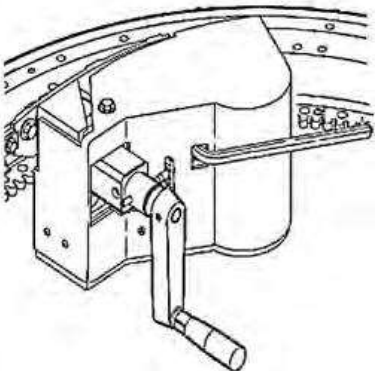Table 1. Preventive Maintenance Checks and Services - Before - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
 <p data-bbox="581 745 1040 781"><i>Figure 13. Manual Traversing Unit.</i></p>				

END OF WORK PACKAGE



**OPERATOR MAINTENANCE  
PREVENTIVE MAINTENANCE CHECKS AND SERVICES (PMCS) - DURING**

**INITIAL SETUP:**

**References**

DA Form 2404

**Table 1. Preventive Maintenance Checks and Services - During.**

<b>ITEM NO.</b>	<b>INTERVAL</b>	<b>ITEM TO BE CHECKED OR SERVICED</b>	<b>PROCEDURE</b>	<b>EQUIPMENT NOT READY/ AVAILABLE IF:</b>
1.	During	Controls and Indicators	<p><b>DRIVER</b></p> <p>a. Monitor fuel gauge.</p> <p>b. Monitor engine oil pressure gauge.</p> <p>c. Monitor coolant temperature gauge.</p> <p>d. Monitor air restriction gauge.</p> <p>e. Monitor voltmeter.</p> <p>f. Monitor brake warning light.</p> <p>g. Check speedometer operation.</p>	<p>Engine oil pressure gauge reads less than 10 psi (69 kPa) at hot idle or 40–45 psi (276–310 kPa) at 2000 RPM.</p> <p>Coolant temperature gauge reads greater than 250° F (120° C) and/or overheat lamp illuminates.</p> <p>Air restriction gauge indicates restriction in air cleaner.</p> <p>Voltmeter indicates a loss of voltage.</p> <p>If light stays lit, brakes may not function properly.</p> <p>Speedometer needle does not move, jerks unevenly during sustained speeds, or appears stuck.</p>



**Table 1. Preventive Maintenance Checks and Services - During - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
2.	During	Brakes	<p><b>DRIVER</b> Check brakes for pulling or grabbing.</p>	Brakes pull or grab.
3.	During	Steering	<p><b>DRIVER</b> Be alert for vibration, excessive sway, leaning to one side, or unstable handling. Check steering response for unusual free play, binding, or shimmy.</p>	Handling is unstable; turning is difficult; unusual free play, binding, or shimmy detected.
4.	During	Accelerator Pedal	<p><b>DRIVER</b> Check response to accelerator feed. Check for sticking or binding pedal.</p>	Pedal sticking or binding.
5.	During	Powertrain	<p><b>DRIVER</b> Be alert for unusual noises or vibrations from engine, transmission, transfer case, differentials, propeller shafts, axle shafts, or wheels.</p>	Unusual noise or vibration detected.
6.	During	Transmission	<p><b>DRIVER</b> Check transmission for proper operation.</p>	Transmission slips or will not shift.
7.	During	Air Conditioner (All Models Except M1113 and M997A3)	<p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>CAUTION</u></b></p> <ul style="list-style-type: none"> <li>• Prior to engagement and during operation of the A/C, ensure the voltmeter needle is in the green zone. Failure to comply may result in damage to equipment.</li> <li>• For A/C system operation in ambient temperatures of 75° F or less, ensure that all instrument panel vents are fully open and the fan switch is on high. Failure to comply may result in damage to equipment.</li> </ul> <p style="text-align: center;"><b><u>NOTE</u></b></p> <p>Perform following inspection only if air conditioner is required for climatic conditions.</p>	

**Table 1. Preventive Maintenance Checks and Services - During - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
8.	During	Ambulance Air-conditioner (M997A3)	<p>Turn air conditioner on. Wait 5 minutes to allow temperature to stabilize. Check vents for cool air.</p> <p><b>DRIVER</b></p> <p><b>CAUTION</b></p> <ul style="list-style-type: none"> <li>• Prior to engagement and during operation of the A/C, ensure the voltmeter needle is in the green zone. Failure to comply may result in damage to equipment.</li> <li>• For A/C system operation in ambient temperatures of 75° F or less, ensure that all instrument panel vents are fully open and the fan switch is on high. Failure to comply may result in damage to equipment.</li> </ul> <p><b>NOTE</b></p> <p>Perform the following inspection only if the air conditioner is required for climatic conditions.</p> <p>Turn air conditioner on and set blower to maximum cooling only speed settings. Wait 5 minutes to allow temperature to stabilize. Check outlet ducts for cool air.</p>	<p>Climatic conditions require air-conditioning and A/C is inoperable, or outlet duct air is not cooler than ambient temperature.</p> <p>Climatic conditions require air conditioning and A/C is inoperable, and if outlet duct air is not cooler than ambient temperature.</p>
9.	During	De-Icer	<p><b>DRIVER</b></p> <p><b>NOTE</b></p> <p>Perform following inspection only if de-icer is required for climatic conditions.</p>	

**Table 1. Preventive Maintenance Checks and Services - During - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			Turn de-icer on. Check to see if de-icer functions by removing steam, frost, or ice from windshield.	De-icer does not operate and mission requires de-icer.

**END OF WORK PACKAGE**



**Table 1. Preventive Maintenance Checks and Services - After - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
2.	After	Transmission Fluid	<p><b>DRIVER</b></p> <p><b><u>CAUTION</u></b></p> <ul style="list-style-type: none"> <li>• Do not permit dirt, dust, fluid or grit to enter transmission oil dipstick tube. Internal transmission damage will result if transmission oil becomes contaminated.</li> <li>• Do not overfill transmission. Damage to transmission will result. An over-full transmission can also indicate a transfer case fluid leak. Notify field maintenance if transmission fluid is above crosshatch mark.</li> </ul> <p><b><u>NOTE</u></b></p> <ul style="list-style-type: none"> <li>• Transmission fluid level should be checked with engine running, parking brake set, transmission shift lever in <b>P</b> (Park), and vehicle on level ground. Fluid level should be at crosshatch marks on dipstick.</li> <li>• Let vehicle idle with all accessories off for three minutes.</li> <li>• Engine operating temperature of 185–250° F (85–120° C) must be reached before performing AFTER checks.</li> </ul> <p>Check transmission fluid level. Apply brake and move shift lever through each gear range. Pause for about three seconds in each range, ending in P. If level is below crosshatch marks, add sufficient fluid to bring level to crosshatch marks.</p>	

**Table 1. Preventive Maintenance Checks and Services - After - Continued.**




ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
 <p><i>Figure 1. Transmission Oil Dipstick.</i></p>				
3.	After	Fuel Filter	<p><b>DRIVER</b></p> <p><b><u>WARNING</u></b></p>  <p>Do not perform fuel system checks, inspections, or maintenance while smoking or near fire, flames, or sparks. Fuel may ignite, causing damage to vehicle and injury or death to personnel.</p> <p><b>NOTE</b></p> <p>A rubber hose can be attached to drain valve to catch fuel in container before opening drain valve. If fuel is clear, put fuel back in fuel tank.</p> <p>a. Check fuel for contamination. With engine running, open drain valve. Allow fuel to drain into suitable container until it runs clear and close valve.</p> <p><b>NOTE</b></p> <p>Fuel retained in drain valve may drip when vehicle vibrations occur. This is normal and does not constitute a leak. Wipe drain valve with rag until excess fuel is removed.</p>	<p>Fuel is not clear after draining 1 pt (0.47 L).</p>

Table 1. Preventive Maintenance Checks and Services - After - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			b. Check for leaks.  c. Stop engine and remove rubber hose from drain valve, if installed.	Class III leakage evident.
				
<p><i>Figure 2. Fuel Filter Drain Valve.</i></p>				
4.	After	Left Side Tires	<p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>WARNING</u></b></p> <p>Operating a vehicle with a tire in an underinflated condition or with a questionable defect may lead to premature tire failure and may cause equipment damage and injury or death to personnel.</p> <p>Visually check tires for underinflation, cuts, gouges, cracks, or bulges. Remove all penetrating objects.</p>	Tires deflated or otherwise unserviceable.
5.	After	Left Side Mirror	<p><b>DRIVER</b></p> <p style="text-align: center;"><b>NOTE</b></p> <p>Vehicle operation with damaged or missing outside rearview mirrors may violate AR 385-10.</p> <p>Check mirror for defects, cracks, and serviceability.</p>	

**Table 1. Preventive Maintenance Checks and Services - After - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
6.	After	Left Front, Side Exterior	<p><b>DRIVER</b></p> <p><b>NOTE</b> If leakage is detected, further investigation is needed to determine location and cause of leak.</p> <ul style="list-style-type: none"> <li>a. Visually check underneath vehicle for evidence of fluid leakage.</li> <li>b. Visually check halfshaft CV boots and ball joint boots for rips, tears, or cuts.</li> <li>c. Inspect frame crossmembers and underbody support for missing hardware, cracks, bends, and breaks. Notify field maintenance if rust is present, but base metal is sound.</li> <li>d. Visually check for body damage that would impair operation of vehicle.</li> </ul>	<p>Any brake fluid leaks; class III leak of oil, fuel, or coolant.</p> <p>Crossmembers or underbody support are missing any hardware, are cracked, broken, or bent or rusted-through condition is present that would affect vehicle operation.</p> <p>Any damage that prevents operation.</p>
7.	After	Rear Exterior	<p><b>DRIVER</b></p> <p><b>NOTE</b> If leakage is detected, further investigation is needed to determine location and cause of leak.</p> <ul style="list-style-type: none"> <li>a. Visually check underneath vehicle for evidence of fluid leakage.</li> <li>b. Visually check halfshaft CV boots and ball joint boots for rips, tears, or cuts.</li> </ul>	<p>Any brake fluid leaks; class III leak of oil, fuel, or coolant.</p>

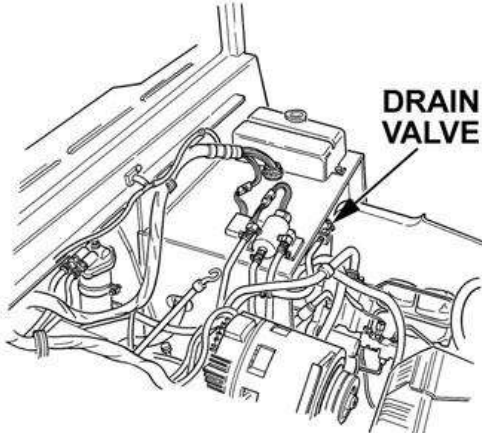


**Table 1. Preventive Maintenance Checks and Services - After - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
8.	After	Right Side Tires	<p>c. Inspect frame crossmembers and underbody support for missing hardware, cracks, bends, and breaks. Notify field maintenance if rust is present, but base metal is sound.</p> <p>d. Inspect bumper or crossmember and inner braces in area around towing pintle for cracks or breaks.</p> <p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>WARNING</u></b></p> <p>Operating a vehicle with a tire in an underinflated condition or with a questionable defect may lead to premature tire failure and may cause equipment damage and injury or death to personnel.</p> <p>Visually check tires for underinflation, cuts, gouges, cracks, or bulges. Remove all penetrating objects.</p>	<p>Crossmembers or underbody support are missing any hardware, are cracked, broken, or bent or rusted-through condition is present that would affect vehicle operation.</p> <p>Bumper, crossmember, or an inner brace is cracked or broken.</p>
9.	After	Right Side Mirror	<p><b>DRIVER</b></p> <p style="text-align: center;"><b>NOTE</b></p> <p>Vehicle operation with damaged or missing outside rearview mirrors may violate AR 385-10.</p> <p>Check mirror for defects, cracks, and serviceability.</p>	<p>Tire deflated or otherwise unserviceable.</p>
10.	After	Right Front, Side Exterior	<p><b>DRIVER</b></p> <p style="text-align: center;"><b>NOTE</b></p> <p>If leakage is detected, further investigation is needed to determine location and cause of leak.</p>	

**Table 1. Preventive Maintenance Checks and Services - After - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
11.	After	Engine Oil	<p>a. Visually check underneath vehicle for evidence of fluid leakage.</p> <p>b. Visually check halfshaft CV boots and ball joint boots for rips, tears, or cuts.</p> <p>c. Inspect frame crossmembers and underbody support for missing hardware, cracks, bends, and breaks. Notify field maintenance if rust is present, but base metal is sound.</p> <p>d. Visually check front and right side of vehicle for obvious damage that would impair operation.</p> <p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>CAUTION</u></b></p> <ul style="list-style-type: none"> <li>• Do not permit dirt, dust, or grit to enter engine oil dipstick tube. Internal engine damage will result if engine oil becomes contaminated.</li> <li>• Do not overfill engine crankcase. Damage to engine will result.</li> </ul> <p>Check engine oil level. Level should be between <b>ADD</b> and <b>FULL</b>. If level is below <b>ADD</b>, add oil to bring level between <b>ADD</b> and <b>FULL</b> marks.</p>	<p>Any brake fluid leaks; class III leak of oil, fuel, or coolant.</p> <p>Crossmembers or underbody support are missing any hardware, are cracked, broken, or bent or rusted-through condition is present that would affect vehicle operation.</p> <p>Any damage that prevents operation.</p> <p>Oil appears milky.</p>

Table 1. Preventive Maintenance Checks and Services - After - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
				
<p><i>Figure 3. Engine Oil Dipstick.</i></p>				
12.	After	Power Steering Lines and Fittings	<p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>CAUTION</u></b></p> <p>Notify field maintenance if power steering system has class III leak. Loss of power assist could occur if this condition exists.</p> <p>Check power steering lines and fittings for leaks.</p>	Class III leakage evident.
13.	After	Cooling System	<p><b>DRIVER</b></p> <p>Inspect radiator hoses for leakage.</p>	Class III leakage evident.
14.	After	Master Cylinder	<p><b>DRIVER</b></p> <p>Visually check master cylinder lines for leaks and security of cover.</p>	Any leak, or cover missing.
15.	After	Lights	<p style="text-align: center;"><b><u>CAUTION</u></b></p> <p>Never set rotary switch to <b>RUN</b> to check lights. This drains batteries and can burn out glow plugs and control box.</p> <p style="text-align: center;"><b>NOTE</b></p> <p>Vehicle operation with damaged or inoperable headlights may violate AR 385-10.</p> <p>a. Check for presence and operation of service drive, turn signal, blackout marker, marker, blackout drive, and side marker lights.</p>	

**Table 1. Preventive Maintenance Checks and Services - After - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
16.	After	Horn	<p>b. Check operation of tail/stoplights. Push down brake pedal approximately 1/4 in. (6.4 mm). Tail/stoplights should come on.</p> <p><b>DRIVER</b></p> <p><b>NOTE</b> Vehicle operation with inoperative horn may violate AR 385-10.</p> <p>Check operation of horn if tactical situation permits.</p>	
17.	After	Windshield and Wipers	<p><b>DRIVER</b></p> <p><b>NOTE</b> Vehicle operation with damaged windshield may violate AR 385-10.</p> <p>a. Check windshield for damage that would impair operator's vision.</p> <p><b>NOTE</b> Vehicle operation with inoperative wipers may violate AR 385-10.</p> <p>b. Check windshield wiper, blade, and washer fluid reservoir for defects, damage, and proper operation.</p> <p>c. Check windshield wiper motor for proper operation.</p> <p>d. Check washer reservoir fluid level.</p>	<p>Windshield is cracked, broken, or discolored (cloudy) sufficiently to impair operator's vision.</p>

**Table 1. Preventive Maintenance Checks and Services - After - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
18.	After	Light Switches	<p>e. Inspect inner surface of windshield glass (spall liner) for complete breaks, delamination, scratches, gouges, tape, decals, adhesives, or blurred vision.</p> <p>f. Inspect outer surface of windshield glass for a complete break.</p> <p><b>DRIVER</b></p> <p><b>NOTE</b> Ensure all switches are in <b>OFF</b> position. Failure to turn switches to <b>OFF</b> position when not in use will drain batteries.</p> <p>Check and ensure all switches are in <b>OFF</b> position.</p>	<p>Bond between glass and frame is separated from glass or frame. Any complete break on inner surface of glass. Any digs, gouges, or scratches on inner surface of glass.</p> <p>Any complete break on outer surface of windshield glass.</p>
19.	After	Patient Compartment (M997A3)	<p><b>DRIVER</b></p> <p>a. Check presence and operation of ceiling white lights, blackout lights, and task lights.</p> <p>b. Check operation of blackout switches at rear step, rear doors, and bulkhead door.</p> <p>c. Inspect condition and security of litter racks and components.</p> <p>d. Inspect upper litter rack hinges and latches for proper operation, damage, or missing components.</p>	<p>One or more lights inoperative or unserviceable.</p> <p>Any blackout switch inoperable.</p> <p>Hinges or latches inoperative, damaged, or missing.</p>

**Table 1. Preventive Maintenance Checks and Services - After - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			<p>e. Inspect tension straps, support straps, litter straps, and footman loops for security of mounting, damage, and missing components.</p> <p>f. Inspect oxygen bottles and mounting components for security of stowage when oxygen bottles are in stowed position.</p> <p>g. Inspect IV straps and hangers for security of mounting, damage, and missing components.</p> <p>h. Check operation of rear doors, handles, and latching mechanisms. Check for loose or missing components. Door should not bind and should close securely when latched shut.</p> <p>i. Inspect rear door seals and step seals for proper installation and condition. Door seals must not allow emission of light signature under blackout.</p>	<p>Rear door handles and latching mechanisms do not operate properly. Missing or damaged components. Rear doors do not operate properly.</p> <p>Door seals allow emission of light signature under blackout conditions (detectable for 50ft (15m) from vehicle).</p>

**END OF WORK PACKAGE**



**OPERATOR MAINTENANCE  
PREVENTIVE MAINTENANCE CHECKS AND SERVICES (PMCS) - WEEKLY**

**INITIAL SETUP:**

**Materials/Parts**

Distilled Water (WP 0132, Item 12)

**References**

WP 0002

WP 0099

DA Form 2404

**Table 1. Preventive Maintenance Checks and Services - Weekly.**

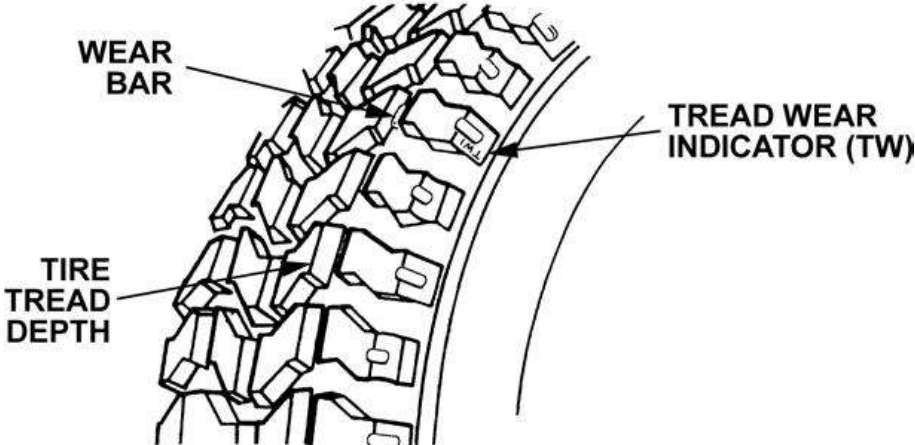
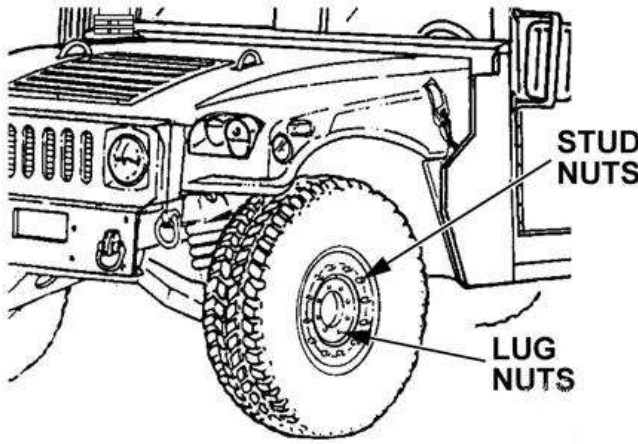
ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
1.	Weekly	Hand Throttle	<p><b>DRIVER</b></p> <p>a. Check hand throttle and mounting bracket for security. Check throttle release lever to ensure hand throttle cable operates properly.</p> <p>b. Check hand throttle cable for corrosion, nicks, breaks, or burns.</p>	



**Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
2.	Weekly	Tires	<p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>WARNING</u></b></p> <ul style="list-style-type: none"> <li>• Do not exceed 50 psi (345 kPa) cold radial tire inflation pressure. Overinflation of tire may result in damage to equipment and injury or death to personnel.</li> <li>• Load Range D valves and tires are not compatible with Load Range E wheels. Load Range E valves and tires are not compatible with Load Range D wheels. Failure to comply may result in damage to equipment and injury or death to personnel.</li> </ul> <p style="text-align: center;"><b>NOTE</b></p> <ul style="list-style-type: none"> <li>• Radial tire is a bidirectional tire and tread may be positioned in either direction.</li> <li>• Refer to Table 19. Tire Pressure (Radial Tire) (Load Range D Tire) or Table 20. Tire Pressure (Radial Tire) (Load Range E Tire) for vehicle tire pressures (WP 0002).</li> </ul> <p>a. Check tire tread depth. Tread should not be worn beyond level of wear bar (1/16 in. (1.59 mm) or less). Wear bars are molded across tread pattern in the valley between center rib and lugs. Tread Wear Indicator letters (TWI) are molded on sidewall to aid in locating wear bar.</p>	<p>Any tread is worn even to height of tread wear indicator (1/16 in. (1.59 mm) or less). Any cut, gouge, or crack that extends to the cord body or any bulges. Tires exhibit excessive inner or outer wear or balance.</p>

Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
		 <p style="text-align: center;"><i>Figure 1. Tire Tread.</i></p>	<p style="text-align: center;"><b>NOTE</b></p> <ul style="list-style-type: none"> <li>• Wear bars are not evident on new or very low mileage tires. Wear bars will appear after usual use.</li> <li>• Some tires will show a diamond instead of TWI indicating where wear bar is located.</li> </ul> <p>b. Check for missing or loose wheel stud nuts and lug nuts. Tighten loose lug nuts and have field maintenance tighten stud nuts and lug nuts to proper torque.</p>	<p>Any wheel stud nut or lug nut is missing or broken.</p>  <p style="text-align: center;"><i>Figure 2. Tire Nuts.</i></p>

**Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
3.	Weekly	Exhaust System	<p style="text-align: center;"><b><u>WARNING</u></b></p> <p>Do not exceed 50 psi (345 kPa) cold radial tire inflation pressure. Overinflation of tire may result in damage to equipment and injury or death to personnel.</p> <p style="text-align: center;"><b><u>CAUTION</u></b></p> <p>Deleted.</p> <p>c. Gauge tires for correct air pressure using tire inflation gauge. Adjust as necessary.</p> <p><b>DRIVER</b> Check exhaust system for security of all mounts, tightness of clamps and bolts, rusted conditions, damaged pipes, and any indication of an exhaust leak.</p>	Any mounts are broken, pipes are rusted through or broken, or any indication of an exhaust leak.
4.	Weekly	Shock Absorbers	<p><b>DRIVER</b> Visually inspect shock absorbers for leaks, damage, and security of mounting.</p>	Class III leakage or damage is evident; mounting damaged or loose.
5.	Weekly	Doors and Windows (M997A3, M1113, M1151, M1152, M1165)	<p><b>DRIVER</b></p> <p>a. Check operation of doors and windows.</p> <p>b. Check crew door assembly for visible cracks that would make door unserviceable or unable to secure properly.</p> <p>c. Check crew door assembly latch, hinges, and door handle for damage, looseness, or missing parts.</p>	Visible cracks or door does not secure properly.
6.	Weekly	Doors and Windows (M1114, M1151A1, M1152A1, M1165A1, M1167)	<p><b>DRIVER</b></p> <p>a. Inspect crew door locks for proper operation.</p>	Loose, missing or unserviceable parts.

**Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
7.	Weekly	Tailgate (All models except M997A3)	b. Inspect inner surface of door glass (spall liner) for complete breaks, delamination, scratches, gouges, tape, decals, adhesives, or blurred vision.  c. Inspect outer surface of door glass for a complete break.  d. (M1114 Only) Inspect door armor for cracks.  <b>DRIVER</b> Check operation of tailgate. Check that tailgate latches securely and operates properly.	Bond between glass and frame is separated from glass or frame. Any complete break on inner surface of glass. Any digs, gouges, or scratches on inner surface of glass. Any complete break on inner surface of glass.  Any complete break of outer surface of door glass.
8.	Weekly	Body (M997A3, M1114, M1151, M1151A1, M1152A1, M1167)	<b>DRIVER</b> a. (All models except M997A3) Inspect cargo shell door for bends, warping, binding, and ease of operation. Inspect latching mechanisms for proper operation. Inspect lift cylinders for bends and security of mounting.  b. (All models except M997A3) Inspect retaining wire rope for damage and security of mounting.  c. (All models except M997A3) Inspect strap assembly for frays and security of mounting.	Lift cylinders or latches bent, warped, binding, or inoperative.  Retaining wire rope is damaged, missing, or not secured.



Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.


ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
				
			<p>i. (All Models Except M1114) Inspect underbody plates for missing retainer plates or screws.</p>	<p>More than one retainer plate missing in positions 1, 2, 3, or 4. Loose or missing more than two screws in positions 1,2,3, or 4.</p>

Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.


ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
				
9.	Weekly	Geared Fan Drive (Serial Numbers 300000 and above Only)	j. Inspect underbody plates for any deformation (buckling, collapsing, or bending). k. (All models except M997A3) Check operation of C-partition door and ensure it will lock in all three positions. <b>DRIVER</b> Check for missing grease fittings.	Deformation is visually detected. C-partition door will not close and lock in all three positions, or inoperative. One or more grease fittings missing.
10.	Weekly	Vehicular Heater	<b>DRIVER (Vehicles w/Vehicular Winterization Kit)</b> a. Check heater and heater controls for proper operation. b. Check fuel lines and fittings for leaks, cracks, or breaks. c. Check electrical cables and connections for security of mounting, and missing components.	Heater inoperable and mission requires heater. Class III fuel leakage is evident and mission requires heater. Wires frayed or broken.

Figure 4. Underbody Armor (All Models Except M1114).



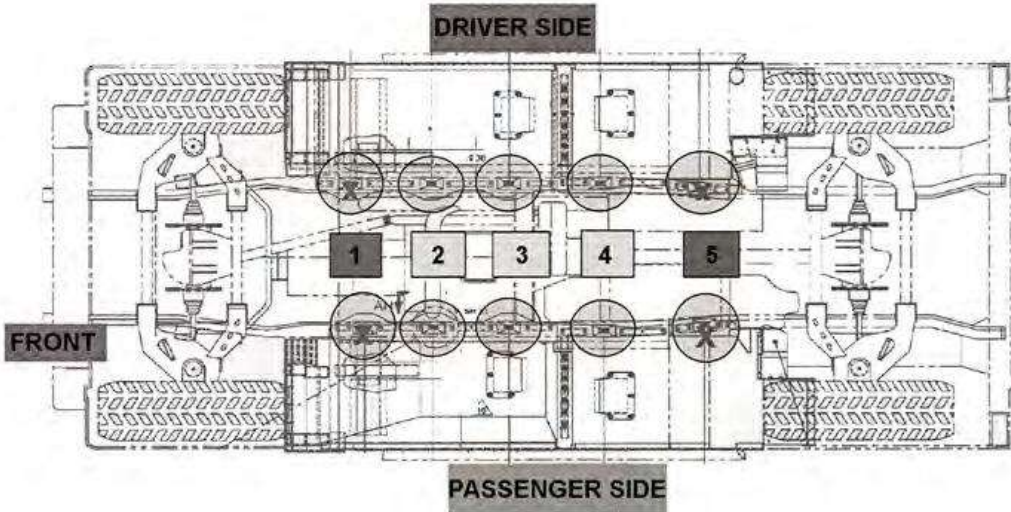

Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.

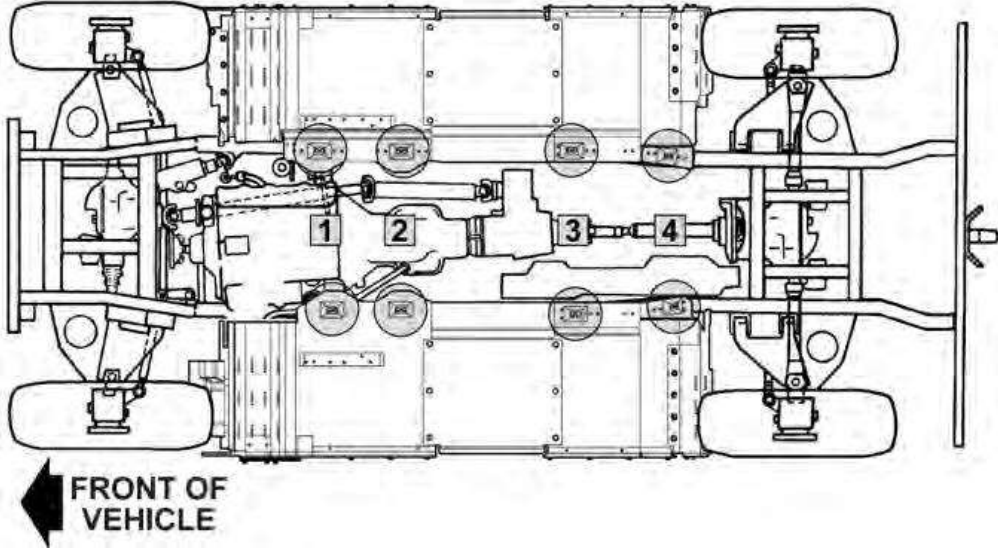


ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
			c. Check support mounts, side brackets, and side bracket weldments on radiator for missing hardware, damage, or broken welds.	Support mounts broken, damaged, or missing hardware. Side brackets damaged of two or more weldments broken, allowing movement of radiator.
 <p>The diagram shows a radiator with various components labeled. 'SIDE BRACKET WELDMENTS' are indicated by arrows pointing to the joints where the side brackets meet the radiator frame. 'SUPPORT MOUNTS' are indicated by an arrow pointing to the vertical brackets that hold the radiator in place. A fan shroud is also visible on the right side of the radiator.</p>				
			d. Check fan shroud for damage.  e. Check engine oil cooler and hoses for damage and leaks.	Fan shroud broken, cracked, or loose that would affect its intended function or mounting.  Class III leak evident.

Figure 5. Cooling System Side Bracket and Support Mounts.

**Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
14.	Weekly	Batteries	<p><b>DRIVER</b></p> <p style="text-align: center;"><b><u>WARNING</u></b></p> <p style="text-align: center;"></p> <p>Do not smoke, have open flames, or make sparks around batteries, especially if caps are off. Batteries can explode and may cause injury or death.</p> <p style="text-align: center;"><b><u>WARNING</u></b></p> <p style="text-align: center;"></p> <p>Remove all jewelry such as rings, dog tags, bracelets, etc. If jewelry contacts battery terminal, a direct short may result, causing severe injury to personnel, or damage to equipment.</p> <p>a. Remove commander seat and check batteries for damaged casing, terminal posts, and security of mounting.</p> <p>b. Electrolyte should be filled to level/split ring in the battery filler opening (vent). If fluid is low, fill with distilled water to split ring (WP 0132, Item 12).</p> <p style="text-align: center;"><b>NOTE</b></p> <p>Water in battery box can be caused by debris plugging battery box drain holes. If water is present, clean debris from battery box drain holes.</p>	<p>One or more batteries missing, unserviceable, or leaking; terminal or cables loose, corroded, or holddowns not secure.</p>

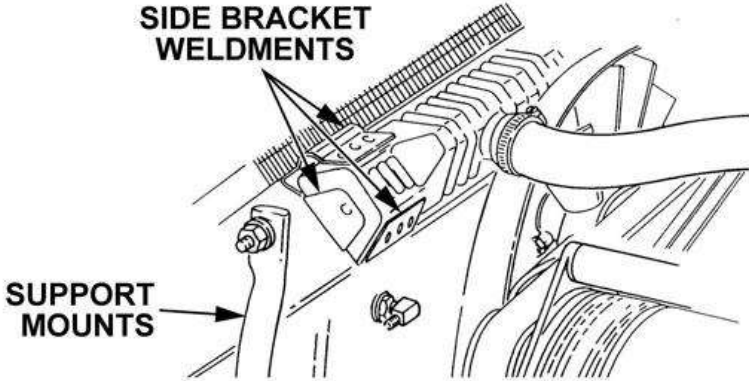**Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
15.	Weekly	Weapon Station	c. Check battery box for corrosion or water on bottom of battery tray.  <b>DRIVER</b> a. Inspect weapon station hatch and hinge for bends, cracks, warped, or damaged areas. b. Inspect brake for ease of operation. c. Inspect gunner’s sling for tears, frays, or damaged hook.	Hatch or hinges inoperable.  Brake does not operate.  Sling is torn, shows wear, or hook is damaged.
16.	Weekly	Tiedowns	<b>DRIVER</b> a. Inspect stored equipment footman loops for presence and security of mounting. Inspect straps for tears or frays. b. Inspect stowage brackets, footman loops, and tiedowns for security of mounting, damage, and missing components. c. Inspect all tiedown strap assemblies for proper operation, frays, damage, cleanliness, and security of mounting.	
17.	Weekly	Tow Pintle	<b>DRIVER</b> Check pintle hook for looseness, damaged locking mechanism, and presence of cotter pin.	
18.	Weekly	Environment Control System	<b>DRIVER</b>  <b>NOTE</b> Insufficient cooling could be a result of loss of R134a refrigerant. This is a gas, therefore leaks cannot be detected. If leaks in lines or fittings are suspected, vehicle is to be considered non-mission capable. Notify field maintenance.	

Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
19.	Weekly	Parking Brake	<p>a. Check Heating, Ventilation, and Air Conditioning (HVAC) vents, and mounting hardware for damage, leaks, missing components, and security of mounting.</p> <p>b. Inspect exposed wiring harnesses for breaks, frayed insulation, loose or damaged connectors, and loose, damaged, or missing mounting hardware.</p> <p><b>DRIVER</b> Check combination service/parking brake assemblies; inspect parking brake for obstruction of actuating lever or broken or missing spring.</p>	<p>Leaks in lines or fittings.</p> <p>Wiring harness broken, frayed, or damaged. Mounting hardware missing.</p> <p>Actuating lever or spring is broken or missing.</p>
20.	Weekly	Steering Gear Mounting	<p><b>DRIVER</b> With vehicle running, observe steering gear mounting area for movement while assistant turns steering wheel left and right.</p>	Any movement observed in steering gear mounting area.
21.	Weekly	Windshield Washer	<p><b>DRIVER</b></p> <p>a. Visually check windshield washer reservoir for damage.</p> <p>b. Check windshield washer fluid level.</p>	
22.	Weekly	TOW ITAS Missile Rack (M1167 Only)	<p><b>DRIVER</b></p> <p>a. Inspect TOW ITAS missile rack locking pins and support braces for presence and ease of operation.</p> <p>b. Inspect straps for tears and frays.</p>	Rack will not stow six TOW ITAS missiles.
23.	Weekly	Floorboard (M1167 Only)	<p><b>DRIVER</b> Check for presence of TU adapter.</p>	TU adapter missing or damaged.

**Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
24.	Weekly	Patient Compartment (M997A3)	<p><b>DRIVER</b></p> <p><b><u>WARNING</u></b></p> <p>Be sure cables are securely connected to the steps before using. Failure to comply may result in injury or death to personnel. Seek medical attention in the event of an injury.</p> <p>a. Inspect step assembly.</p> <p>b. Check operation of step latch. Latch should securely engage step striker to secure step assembly in the stowed position.</p> <p>c. Check operation of attendant seat and rail. Inspect seat and rail for damage, missing components, and binding during operation. Ensure proper adjustment and operation of seat belt.</p> <p>d. Check operation of ambulatory patient seat for damage or missing components.</p> <p>e. Inspect handhold straps and footman loops for security, damage, or missing components.</p>	<p>Step assembly is damaged or inoperable.</p> <p>Latch is damaged or inoperable.</p> <p>Seat belt, attendant seat, or rail is broken or missing.</p> <p>Ambulatory patient seat is broken or missing.</p> <p>Handhold straps and footman loops are damaged, unsecured, or missing components.</p>
25.	Weekly	Bulkhead Doors (M997A3)	<p><b>DRIVER</b></p> <p>a. Check operation of bulkhead doors. Doors should securely latch when closed or fully opened. Inspect all door components for damage, adjustment, or missing components.</p>	

**Table 1. Preventive Maintenance Checks and Services - Weekly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
26.	Weekly	NBC (CBRN) Filtration System (M997A3)	<p><b>DRIVER</b></p> <ul style="list-style-type: none"> <li>a. Inspect exposed NBC (CBRN) equipment for security of mounting, damage, and missing components.</li> <li>b. Inspect NBC (CBRN) stowage compartment door seals, hinges, latches, and straps for proper operation, damage, and missing components.</li> <li>c. Inspect M13 patient protective mask, hoses, and end connectors for damage, leaks, or missing components. Inspect adapter for stripped threads or other damage.</li> </ul>	<p>Equipment damaged or unsecured.</p> <p>Components inoperable, damaged, or missing.</p> <p>Components inoperable, damaged, or missing.</p>
27.	Weekly	HVAC Air Intake Filter (M997A3)	<p><b>DRIVER</b></p> <ul style="list-style-type: none"> <li>a. Inspect HVAC air intake filter for tears, rips, contaminants, or other damage. Refer to Heating, Ventilation, and Air-Conditioning (HVAC) air intake filter service.</li> <li>b. Inspect HVAC air intake filter frame for cracks, bends, or damaged.</li> </ul>	<p>Air intake filter torn, ripped, or damage.</p> <p>Frame cracked, bent, or damaged.</p>

**END OF WORK PACKAGE**



**OPERATOR MAINTENANCE  
PREVENTIVE MAINTENANCE CHECKS AND SERVICES (PMCS) - MONTHLY**

**INITIAL SETUP:**

**Materials/Parts**

Lubricant (WP 0132, Item 30)

**References**

WP 0033

**Table 1. Preventive Maintenance Checks and Services - Monthly.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
1.	Monthly	Corrosion	<p><b>DRIVER</b> Visually inspect vehicle for indication of corrosion, cracks, and/or breaks.</p>	Any corroded-through condition, cracks or breaks that would affect vehicle operation.
2.	Monthly	Tailgate (All models except for M997A3)	<p><b>DRIVER</b> Check tailgate for corroded-through condition and/or damage. If tailgate does not latch securely or is damaged, notify field maintenance.</p>	Any corroded-through condition, or damage that would affect vehicle operation.
3.	Monthly	Winch	<p><b>DRIVER</b></p> <ol style="list-style-type: none"> <li>a. Check winch controls for proper operation.</li> <li>b. Check winch cable for kinks, frays, or breaks.</li> <li>c. Inspect tree saver strap for cuts and abrasions. If red safety thread is visible in main body of strap, notify field maintenance for replacement of strap.</li> <li>d. If it is known strap has been overloaded, notify field maintenance for replacement of strap.</li> <li>e. Wrap winch cable (WP 0033).</li> </ol>	
4.	Monthly	Zippers	<p><b>DRIVER</b></p> <ol style="list-style-type: none"> <li>a. Check canvas top and door zippers for corrosion and/or damage.</li> </ol>	



**Table 1. Preventive Maintenance Checks and Services - Monthly - Continued.**

ITEM NO.	INTERVAL	ITEM TO BE CHECKED OR SERVICED	PROCEDURE	EQUIPMENT NOT READY/ AVAILABLE IF:
5.	Monthly	TOW ITAS Power Cable (M1167 Only)	b. Clean zippers with toothbrush. Apply interlock lubricant to canvas top, door zippers, and threads that hold zipper in place (WP 0132, Item 30).  <b>DRIVER</b> Inspect TOW ITAS power cable at point where it exits battery box. Chafing of nylon braid that covers cable is acceptable. If wire inside the cable is exposed, notify field maintenance.	Wire inside cable is exposed.
6.	Monthly	Red Cross Plate (M997A3)	<b>DRIVER</b> Check cross marking latches and hinges for proper operation, security of mounting, damage, or missing components.	
7.	Monthly	Stowage Component Door (M997A3)	Inspect stowage component door hinge, seal, and latch for proper operation, damage, or missing components.	

**END OF WORK PACKAGE**